



Well-known home
Quality home
Smart home

世家 优家 智家

◎地址: 江苏省滨湖高新技术产业开发区康力大道888号
◎电话: 0512-63290000
◎传真: 0512-63293938
◎网址: www.canny-elevator.com
◎电子信箱: (国内) sales@canny-elevator.com
(国外) export-canny@163.com
export@canny-elevator.com
◎400客户服务热线: 400-188-2367
◎邮编: 215213

◎Add: No.888, Kangli Road, FOHO New & Hi-Tech Industrial
Development Zone, Jiangsu Province, China.
◎Tel: +86-512-63290000 63297851
◎Fax: +86-512-63299709
◎URL: www.canny-elevator.com
◎E-mail: export-canny@163.com
export@canny-elevator.com
◎P.C: 215213



扫描二维码关注
康力电梯微信公众号
Scan the QR code and pay attention to
CANNY ELEVATOR WeChat Public Number

本书为一般信息类出版物, 我们保留随时更改产品设计和说明的权利, 所有图片和颜色可能与实物有所不同, 请以实物为准。
康力电梯股份有限公司©版权所有 2023-V1.0版

Home Lift

家用电梯

KONL® 康力电梯
CANNY ELEVATOR

It carries people and dreams
and enriches intelligent life

承载人与梦想 丰富智慧生活

关于康力

康力电梯股份有限公司成立于1997年，是一家集设计、制造、销售、安装、维保于一体的现代化专业电梯企业。2010年康力在深交所上市，是中国电梯行业首个A股上市企业。康力以做强民族品牌为己任致力于成为极具国际竞争力的综合服务商和品牌运营商，综合实力和产业规模居行业前茅。

About Canny

Canny Elevator Co., Ltd. was founded in 1997, is a collection of design, manufacturing, sales, installation, maintenance in one of the modern professional elevator enterprises. Listed in Shenzhen Stock Exchange in 2010, it is the first A-share listed enterprise in China's elevator industry. Kangli is committed to becoming a comprehensive service provider and brand operator with strong international competitiveness, with comprehensive strength and industrial scale leading the industry.

TOP10


全球十大电梯制造商TOP10
Global top 10 elevator
manufacturer



国家认定企业技术中心
State recognized enterprise
technology center

100+

100+分公司和服务中心
100+ branches and
service centers



完备的核心部件产业链
A complete industrial
chain of core parts

康力家用电梯系列采用先进的设计理念，搭载卓越技术，
以更安全、更舒适的杰出品质，全感官唤醒墅居生活品质。

Canny home elevator series adopts advanced design concept, equipped
with excellent technology, with more safety, more comfortable outstanding
quality, full sense awakening villa life quality.

别墅出行新方式 品质生活新定义

康力家用电梯——

专为美居而生，为您解锁生活的不同“享”法。

Villa travel new way New definition of quality life
Canny home elevator - designed for Mercure,
for you to unlock different life "enjoy" method.

A good life begins at home
Canny Elevator Lights up 'Yearning for Life'

美好生活 从家开始
康力电梯点亮“向往的生活”

Create the happiness
of life with excellent performance

以卓越性能 创生活之幸

康力以超越标准的优秀品质，
全力打造不凡的电梯出行体验。

Canny to exceed the standard of excellent quality,
to create extraordinary elevator travel experience.



更安全
More safer



更节能
More energy efficient



更平稳
More smoother



更舒适
More comfortable

追求理想生活，从拥有舒适感的家开始
康力家用电梯，家的共同选择

To pursue an ideal life, start with a comfortable home
Kangli home elevator, home common choice



应用永磁同步技术，有效节能40%以上
Applied permanent magnet synchronous technology, effective energy saving
more than 40%



使用220V家用电源，运行功率之小与普通家电相当
220V household power supply is used, and the operating power is comparable to that of
ordinary household appliances



加减速曲线平缓，系统自动计算最佳运行状态，运行平稳舒适
The acceleration and deceleration curves are gentle, and the system automatically
calculates the optimal running state, making the operation stable and comfortable



植入自主研发的一键式呼叫功能，实现意外发生后快速脱困
Implant self-developed one-button call function to realize quick escape after accidents



智能光幕灵敏监测，实时保障出入安全
Intelligent light curtain sensitive monitoring to ensure real-time access safety



每台配备独立的安全制动，并搭载全方位的安全保护系统
Each unit is equipped with an independent safety brake and a comprehensive safety
protection system



使用通过800万次可靠验证的永磁门系统
Use a permanent magnet door system that has been reliably verified 2 million times



使用绿色环保材料，打造“静音、环保”的绿色乘梯空间
Use green materials to create "silent and environment-friendly" green escalator space



可用语音呼梯、手机呼梯、感应呼梯，为用户提供更方便快捷的乘梯体验
Voice call, mobile call and induction call are available to provide users with more
convenient and quick ride experience



可与手机互联，电梯状态随时掌握
It can be connected with mobile phone, and the elevator status can be mastered at
any time

With advanced strength,
create the beauty of living travel

用进阶实力, 创领人居出行之美

康力家用电梯搭载领先技术,
全新的智能家居体验, 打造全维度的自在、舒适感受。

Canny home elevator carrying the leading technology,
a new smart home experience, to create a full dimension of free,
comfortable feeling.

SIL3

拥有行业SIL3等级安全认证,
融合多重困人解决方案,
电梯使用更安心

Have SIL3 level of safety cognition in
the industry and integrate multiple
schemes for poor people, making
elevator use more secure

AI

智能科技加持,
具备轿厢内摔倒检测、困人检测
Intelligent technology, with the car fall
detection, difficult person detection



使用家用电梯专用驱动,
上下乘行更舒适

It is more comfortable to ride up and
down by using the special drive of
household elevator



使用新型小巧、超静音控制柜,
兼具故障自动救援、停电应急救援等功能,
不仅静音也更安全

The new compact and ultra-silent control cabinet is
used, which has functions such as automatic fault
rescue and power failure emergency rescue, etc.,
which is not only mute but also safer



采用无缝集成控制与驱动,
实现精准控制, 保障电梯平稳运行,
实现最佳舒适感

Adopt seamless integrated control and drive to
achieve accurate control, ensure smooth operation of
the elevator and achieve the best comfort

匠心细节, 承载美好生活的期许
力达卓越, 打造极致的乘梯体验
康力电梯, 让私宅出行惬意自如

Ingenuity and detail, all carry the expectation of a
better life
To achieve excellence, to create the ultimate ride
experience
Kangli elevator does not bear the load, so that private
house travel comfortable and free


With all-round attitude,
help the people quality travel

用全能姿态,助力全民品质出行


康力电梯有着成熟的土建经验,多元化解方案,
可针对不同建筑结构、建筑空间,为您定制适配度最高的安装及入户方案。

Canny Elevator has mature experience in civil construction, diversified solutions, for different building structures, building space, for you to customize the highest degree of fitness installation and entry scheme.


- 无需建筑墙体开孔,定位简单,安装便捷
- 井道利用率高,对重位置灵活,可侧置、后置,安全可靠
- 突破空间限制的全建筑结构解决方案
- No need for building wall openings, simple positioning and convenient installation
- High utilization rate of well way, flexible weight position, side and rear setting, safe and reliable
- All-building structural solutions that break space constraints

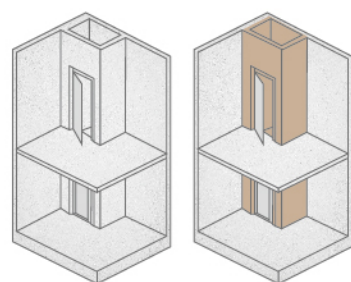


01 混凝土井道
Concrete Well

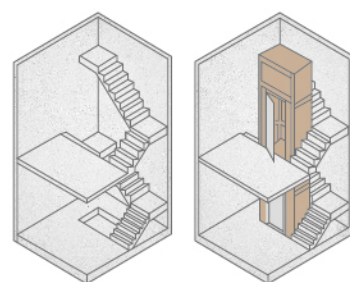


02 环绕楼梯中间
The Middle of Spiral Stairs

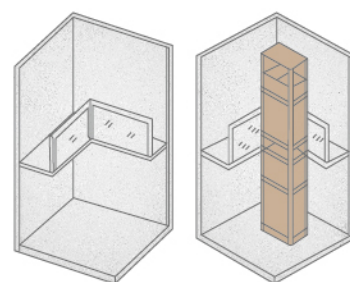


03 中空大厅
Hollow Hall

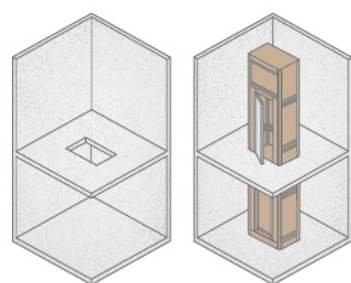

04 室内楼板开孔
Bore Indoor Floors

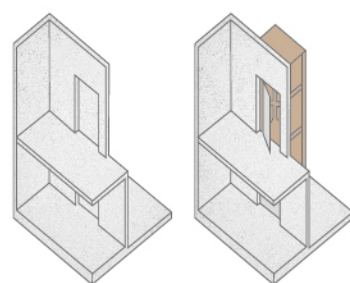

05 室外梯
Outdoor Stairs

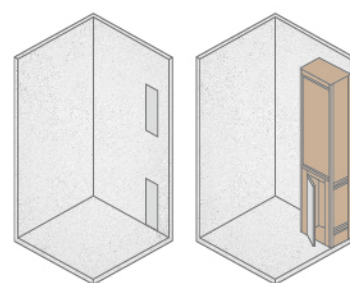

06 入户门厅
Entrance Hall

全生命周期专业服务

康力六大特色服务,
完美落地每一位客户的个性化定制服务

Full life cycle professional services

Canny six special services, perfect landing of each customer personalized customized services



前期服务能力
Early service ability



快速设计服务能力
Rapid design service ability



个性化设计服务能力
Personalized design service ability



智能制造能力
Intelligent manufacturing ability



快速安装维保服务能力
Rapid installation and maintenance service ability



优质售后服务能力
High-quality after-sales service ability

专业服务 专业定制 快速响应
康力电梯懂生活·更懂你的个性品味

Professional services professional customized fast response
Kang Li elevator understand life, better understand your personality taste


Focus on home
Well-known · Quality home · Smart home

专注为家 世家·优家·智家

主流梯型全覆盖, 设计不拘泥传统, 灵活适配各种建筑条件, 全面满足用户需求, 全方位解码奢适空间。

Full coverage of the mainstream ladder, the design does not adhere to tradition, flexibly adapt to various architectural conditions, fully meet the needs of users, all-round decoding of luxury and suitable space.

世家系列·钢带曳引 Well-known home series



应用复合钢带

- 减小曳引轮径, 优化空间布局, 节省井道空间
- 运行噪音更低, 提升效率, 带来更舒适的体验

Composite steel strip is applied

- Reduce the drag wheel diameter to save well space
- The use of lower noise, friction stability, improve efficiency, bring more comfortable experience

- 载重: 250-400kg
- 额定速度: 0.4m/s
- 最大提升高度: 18m

- Load: 250-400kg
- Rated speed: 0.4m/s
- Maximum lifting height: 18m

使用高效节能型主机


- 运转平稳, 电机传动效率可达90%
- 体积比传统主机小70%, 结构更紧凑, 更节省建筑空间

Use high efficiency and energy saving host

- Smooth operation, motor transmission efficiency can reach 90%
- The volume is 70% smaller than the traditional main engine, the structure is more compact, and the building space is saved



智家系列·集成背包 Smart home series



采用新型集成轿架设计

- 集成背包结构和轿厢系统中心与承载中心重合的新型布局, 突破背包结构, 实现平稳运行

Adopt new integrated car frame design

- The integrated backpack structure and the new layout of the car system center and the bearing center coincide, breaking through the backpack structure, to achieve smooth operation

紧凑空间 合理布局

- 井道利用率更高, 一平米即可实现电梯的安装和使用

Use high efficiency and energy saving host

- The well utilization rate is higher, one square meter can realize the installation and use of the elevator

- 载重: 180-400kg
- 额定速度: 0.3m/s
- 曳引比: 2:1
- 最大提升高度: 15m
- Load: 180-400kg
- Rated speed: 0.3m/s
- Traction ratio: 2:1
- Maximum lifting height: 15m



全力匹配理想的垂直出行解决方案, 康力家用电梯系列, 总有一款适合您。

Fully match the ideal vertical travel solution
Canny home elevator series, there is always a suitable for you.


优家系列·龙门架 Quality home series

采用传统结构设计

- 常规客梯龙门架模式, 受力均匀, 架构简单

Traditional structural design is adopted

- Conventional passenger ladder door frame mode, uniform force, simple structure



小顶层设计

- 应用部件布置设计提供小顶层需求, 可充分满足和匹配各类建筑

Small top design

- Application component layout design provides small top floor requirements, can be filled to meet and match all types of buildings

- 载重: 250-400kg
- 额定速度: 0.4m/s
- 曳引比: 2:1
- 最大提升高度: 15m
- Load: 250-400kg
- Rated speed: 0.4m/s
- Traction ratio: 2:1
- Maximum lifting height: 15m



Classic style

经典风格

KL/J22-403

吊顶 Ceiling

KL/DD-J403 原色发纹, 亚克力, LED照明

KL/DD-J403 Primary hairlines, acrylic, LED lighting

轿壁 Car wall

贴膜钢板, 原色镜面, 原色发纹
Coated steel plate, primary color mirror, primary hairline

前壁 Front wall

原色发纹
Primary hairline

地板 Floor

KL/JD-J353 PVC
KL/JD-J353 PVC

轿门 Car door

原色发纹
Primary hairline

印刷颜色与实物色彩可能存在差异, 请以实物为准。

There may be differences between the printina color and the real object color, Please refer to the real obiect.



Italian luxury

意式轻奢

KL/J22-409

吊顶 Ceiling

钛黑镜面, 波纹板, LED照明
Titanium black mirror, corrugated plate,
LED lighting

轿壁 Car wall

钛黑镜面, 木饰面, 艺术工艺板, LED照明
Titanium black mirror, wood finish, artwork
board, LED lighting

前壁 Front wall

钛黑发纹
Titanium black hairline

地板 Floor

大理石拼花
Marble mosaic

扶手 Handrail

黑金扁钢
Black gold flat steel

轿门 Car door

钛黑发纹
Titanium black hairline

印刷颜色与实物色彩可能存在差异, 请以实物为准。

There may be differences between the printina color and the real
object colorPlease refer to the real object



Italian luxury

意式轻奢

KL/J22-502



吊顶 Ceiling

进口钢板, LED照明
Imported steel plate, LED lighting

轿壁 Car wall

进口钢板, 原色镜面, 原色镜面蚀刻
Imported steel plate, primary color mirror, primary color mirror etching

前壁 Front wall

钛黑发纹
Titanium black hair stripe

扶手 Handrail

金色圆管
Golden tube

地板 Floor

PVC
PVC

轿门 Car door

钛黑发纹
Titanium black hair stripe

印刷颜色与实物色彩可能存在差异, 请以实物为准。
There may be differences between the printina color and the real obiect color, Please refer to the real obiect.



Elegant charm new Chinese style

雅韵新中式

KL/J23-553

吊顶 Ceiling

原色镜面, 波纹板, LED照明
Mirror of original color, corrugated panel,
LED lighting

轿壁 Car wall

原色镜面, 原色镜面蚀刻,
艺术花纹不锈钢, LED照明
Mirror of original color, mirror etching of
original color, art pattern stainless steel,
LED lighting

前壁 Front wall

原色发纹
Hairline of original color

地板 Floor

PVC
PVC

扶手 Handrail

黑色方管
Black square tube

轿门 Car door

原色发纹
Hairline of original color

印刷颜色与实物色彩可能存在差异,
请以实物为准。

There may be differences between the printina
color and the real object color, Please refer to
the real object.



Elegant charm new Chinese style

雅韵新中式



KL/J23-554

吊顶 Ceiling

玫瑰金镜面, 亚克力, 进口钢板, LED照明
Rose gold mirror, acrylic, imported steel plate, LED lighting

轿壁 Car wall

玫瑰金镜面, 玫瑰金镜面蚀刻, 玫瑰金发纹, LED照明
Rose gold mirror, rose gold mirror etching, rose gold hairline, LED lighting

前壁 Front wall

玫瑰金发纹
Rose gold hairline

地板 Floor

大理石, 钢条
Marble, bronze strip

扶手 Handrail

黑金方管
Black gold square tube

轿门 Car door

玫瑰金发纹
Rose gold hairline

印刷颜色与实物色彩可能存在差异, 请以实物为准。

There may be differences between the printing color and the real object color, Please refer to the real object.





Classic style

观光风格

KL/J23-560

吊顶 Ceiling

钛黑喷砂, 钛黑镜面, LED照明
Titanium black sand blasting, titanium black mirror, LED lighting

上下罩 Upper/lower hood

钛黑喷砂
Titanium black sand blasting

轿壁 Car wall

钛黑喷砂, 夹胶玻璃, LED照明
Titanium black sand blasting, laminated glass, LED lighting

前壁 Front wall

钛黑喷砂
Titanium black sand blasting

地板 Floor

大理石拼花
Marble mosaic

扶手 Handrail

可选配
Optional

轿门 Car door

钛黑喷砂, 夹胶玻璃
Titanium black sand blasting, laminated glass



印刷颜色与实物色彩可能存在差异, 请以实物为准。

There may be differences between the printina color and the real object color, Please refer to the real object.



Human computer
interaction system

人机交互系统

操纵盘 Steering wheel



- KL1132-1C**
尺寸:705*170mm
① 金属面板 (月光银、玫瑰金、太空黑)
② 树脂按钮
③ LED断码显示
④ 一键救援功能
⑤ 最高6层



- KL1132-2C**
尺寸:705*170mm
① LOGO发光设计
② 黑色玻璃面板 (面板可选白色)
③ 触摸按钮
④ LED断码显示
⑤ 一键救援功能
⑥ 最高6层

操纵盘 Steering wheel



- KL1128C**
325*166*6mm
① 10.1寸触摸屏
② 手机APP控制功能
③ 密码设置功能
④ 一键救援功能
⑤ 天气预报实时更新
⑥ 最高8层



- KL1133C**
400*200mm
① 旋钮选层功能
② 7寸显示屏
③ 钢化玻璃面板
④ 一键救援功能
⑤ 最高8层



- KL1135C**
350*201*11.5mm
① 13.3寸触摸屏
② 一键救援功能
③ 天气预报实时更新
④ 支持童锁功能
⑤ 可选配防跌倒检测功能
⑥ 最高6层

外呼 Outbound



- KL1331H**
尺寸:95*60*14mm
① 无底盒外呼
② 玻璃面板
③ 触摸按钮



- KL1334H**
尺寸:260*90*12.5mm
① 无底盒外呼
② 曲面2.5D造型,大视窗段码显示
③ 机械按钮



- KL1281-1H**
尺寸:φ76*13mm
① 钢化玻璃面板
② 手势+感应+语音三合一呼梯



- KL1332H**
尺寸:130*60*14mm
① 无底盒外呼
② 玻璃面板
③ 触摸按钮



- KL1335H**
尺寸:164*58*19mm
① 无底盒外呼
② 钢化玻璃
③ 红外触摸按钮



- KL1295H**
尺寸:φ76*6.5mm
① 2.1寸高清液晶
② 钢化玻璃面板
③ 童锁功能
④ 呼梯密码设置功能
注:只适用于铝型材井道

KL1291H

- 尺寸:220*87*13mm
① 钢化玻璃面板
② 标配颜色:黑色
 可选颜色:香槟金、苹果白
③ 机械按钮

注:外呼显示字符范围为:1~9、-1~9、B1、B2,其中KL1331H、KL1332H、KL1335H三款外呼无法显示B1、B2,如需求超出以上显示范围,请与技术确认。



Frame well

框架井道

可自带框架钢井道，造型高雅，用材精致，
简易快速组装，为用户空间的利用提供灵活的安装方案

印刷颜色与实物色彩可能存在差异，请以实物为准。
There may be differences between the printina color and
the real obiect colorPlease refer to the real obiect



亮光白
Bright white

有偿选配 Paid options

透明夹胶玻璃侧板
亮光白门框
透明夹胶玻璃门板
平开手拉门
KL1335H外呼



香槟金
Champagne gold

有偿选配 Paid options


透明夹胶玻璃侧板
香槟金门框
透明夹胶玻璃门板
平开手拉门
KL1335H外呼



香槟银
Champagne silver

有偿选配 Paid options

透明夹胶玻璃侧板
香槟银门框
透明夹胶玻璃门板
平开手拉门
KL1335H外呼



磨砂黑
Frosted black

有偿选配 Paid options

透明夹胶玻璃侧板
磨砂黑门框
透明夹胶玻璃门板
平开手拉门
KL1335H外呼



Landing door series

厅门系列

平开手拉门 Side-hinged manual door



KL/M-4090
标配 Standard
亮光白



KL/M-4091
有偿选配 Paid options
香槟金



KL/M-4092
有偿选配 Paid options
香槟银



KL/M-4093
有偿选配 Paid options
磨砂黑

井道框架、门框选型
Selection of shaft frame and door frame



亮光白
Bright white



香槟金
Champagne gold



香槟银
Champagne silver



磨砂黑
Frosted black



玫瑰金
Rose gold


玻璃门、井道侧板选型
Selection of glass doors and side well plates



磨砂玻璃
Frosted glass



蓝芯灰玻璃
Blue core grey glass



透明玻璃
Clear glass

拉手选型
Selection of handle



KL-LS001



KL-LS002



KL-LS003



KL-LS004

材质：铝镁合金 颜色：银、黑、香槟
※以上拉手材质、颜色相同

印刷颜色与实物色彩可能存在差异, 请以实物为准。
There may be differences between the printina color and the real obiect colorPlease refer to the real obiect

自动门 Automatic door



KL-TM 001
标配 Standard

厅门：
发纹不锈钢
门套：
发纹不锈钢



KL-TM 005
有偿选配 Paid options

厅门：
发纹不锈钢, 玻璃
门套：
发纹不锈钢



KL/M-4039
有偿选配 Paid options

厅门：
发纹蚀刻
门套：
发纹不锈钢



KL/M-4050
有偿选配 Paid options

厅门：
镜面蚀刻镀玫瑰金
门套：
玫瑰金镜面



KL/M-4053
有偿选配 Paid options

厅门：
镜面蚀刻
门套：
镜面不锈钢



KL/M-4059
有偿选配 Paid options

厅门：
镜面蚀刻镀香槟金
门套：
香槟金镜面



KL/M-4063
有偿选配 Paid options

厅门：
发纹蚀刻镀古铜
门套：
古铜发纹



KL/M-4069
有偿选配 Paid options

厅门：
镜面蚀刻镀玫瑰金
门套：
玫瑰金镜面



KL/M-4077
有偿选配 Paid options

厅门：
发纹蚀刻镀钛金
门套：
发纹镀钛金



KL/M-4081
有偿选配 Paid options

厅门：
镜面蚀刻镀钛黑
门套：
钛黑镜面

List of specifications

全系列规格表

梯型 Elevator type	世家系列 钢带曳引 Well-known home series	优家系列 龙门架 Quality home series	智家系列 集成背包 Smart home series	备注 Remark
额定速度 Rated speed	0.4	0.4	0.3	GB/T21739《家用电梯制造与安装规范》规定 The stipulations of the Rules for the Construction and Installation of Home Elevators GB/T21739
最大提升高度 Maximum traveling height	18	15	15	GB/T21739《家用电梯制造与安装规范》 规定最大提升高度12m According to the Rules for the Construction and Installation of Home Elevators GB/T21739, the maximum traveling Height is12m
最小顶层高度 Minimum overhead	3100	2800	2900	验收要求最小顶层高度3150 According to the acceptance requirement, the minimum overhead is 3,150mm
最小底坑深度 Minimum pit depth	270	320	150	验收要求最小底坑深度450 According to the acceptance requirement, the minimum pit depth is 450mm
最小提升高度 Maximum traveling height		2400		
最小层高 Minimum floor height		2400		
适用井道 Suitable for wells		混凝土井道/框架 Concrete wells/frames		
主机布置 Machine arrangement		上置式井道顶部 On well top		
控制柜布置 Control cabinet arrangement		顶层厅门旁（墙内） Beside the top landing door (embedded in the wall)		
对重位置 Counterweight position	侧置 Side	侧置 Side	后置 Rear	
出入口方式 Access mode	单开 Single open	单开 Single open	单开 Single open	标配 Standard
	贯通 Through opening	贯通 Through opening		
开门方式 Door opening model			直角贯通 90° Through opening	直角手拉门 90-degree Opening Manual Door
	中分自动门 Automatic center opening door	中分自动门 Automatic center opening door	平开手拉门 Side-hinged manual door	标配 Standard
	旁开自动门 Automatic side-opening door	旁开自动门 Automatic side-opening door		
动力电源 Power supply	220V单相 220 V single phase	220V单相 220 V single phase	220V单相 220 V single phase	标配 Standard

List of functions


功能列表

 安全保护 Security protection	 可靠运行 Reliable operation	 节能舒适 Energy saving comfort
01 安全回路保护 Safety circuit protection	01 轿门开门限制装置 Car door opening restriction device	01 闲时轿厢内照明及风扇自动停止 In idle time, lighting and fan in car stop automatically
02 门联锁保护 Door interlock protection	02 楼层信号自动校正 Automatic floor signal correction	02 轿内反向指令消除 Reverse instruction elimination in car
03 抱闸检测保护 Lock detection and protection	03 运行曲线自动生成 The running curve is generated automatically	03 控制系统自诊断 Control system self-diagnosis
04 端站减速监控 Terminal deceleration monitoring	04 停电恢复自动校正 Power failure recovery automatic correction	04 误登记取消 False cancellation of registration
05 限位保护 Limit protection	05 修正运行 Correction run	05 运行状态显示 Running status display
06 极限保护 Ultimate protection	06 井道参数自学习 Well parameter self-learning	06 开门保持时间智能调节 Open the door to keep time intelligent adjustment
07 光幕保护 Light curtain protection	07 呼梯按钮嵌入自诊断 Call button embedded self-diagnosis	07 关门按钮提前关门 Close the door button to close the door early
08 门区外不能开门保护 No door protection outside the door area	08 故障记录和诊断 Fault recording and diagnosis	08 一键拨号电话机 One-button dialing telephone
09 超速保护 Overspeed protection	09 干扰评价 Interference evaluation	09 轿厢到站钟（选配） Car arrival clock (optional)
10 超载报警指示 Overload warning indication	10 编码器评价 Encoder evaluation	10 语音报站（选配） Voice announcement station (optional)
11 故障时自动靠站 Automatic stop in case of failure	11 输入口干扰评价 Input port interference evaluation	11 语音安抚（选配） Voice comfort (optional)
12 电梯受阻保护 Elevator blocking protection	12 门锁短接检测 Short connection detection of door lock	12 停电自动应急平层 Automatic emergency level operation
13 变频器过热保护 Converter overheating protection	13 电网异常检测 Power grid anomaly detection	13 电动松闸 Electric release Brake
14 电梯驱动过电流保护 Lift drive overcurrent protection	14 紧急电动运行 Emergency electric operation	
15 电梯驱动过负载保护 Lift drive over load protection	15 电梯待机自检 Elevator standby self check	
16 主回路故障保护 Main loop fault protection	16 静态定位功能 Static positioning function	
17 CAN通讯故障保护 CAN communication fail-safe	17 控制系统自诊断 Control system self-diagnosis	
18 门开关故障保护 Door switch fault protection	18 检修零速停车 Zero speed stop for maintenance	

Construction layout drawing/specifications

土建图/规格表

开门方式土建图 Open-door civil construction drawing

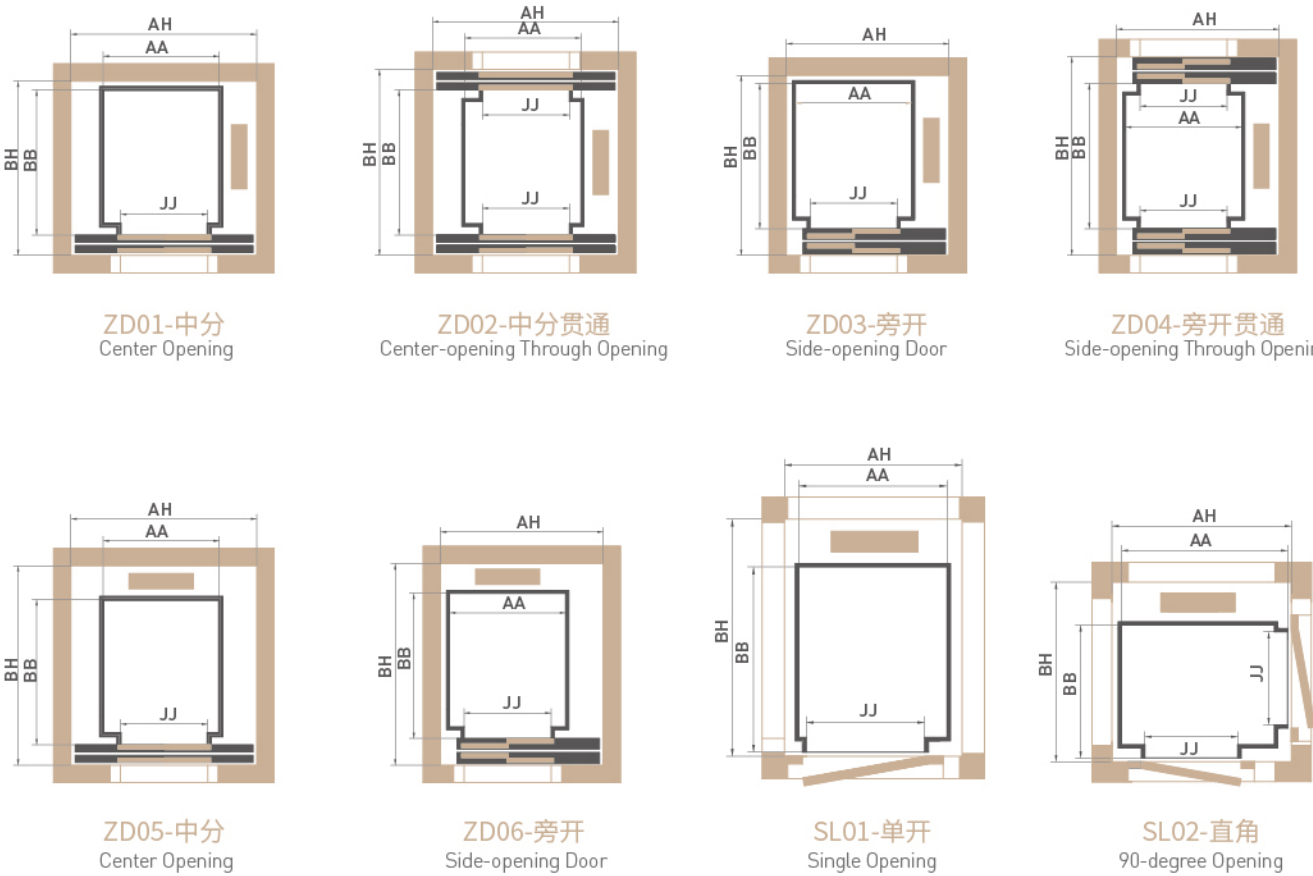

世家系列·钢带后置电梯规格表 List of specifications

载重量		250		320		400	
结构型式		ZD05 中分	ZD06 旁开	ZD05 中分	ZD06 旁开	ZD05 中分	ZD06 旁开
对重位置		后置		后置		后置	
轿厢净宽 (mm)		1000	1000	1100	1100	1100	1100
轿厢净深 (mm)		950	950	1000	1000	1200	1200
轿厢净高 (mm)		2100	2100	2100	2100	2100	2100
开门宽度 (mm)		650	700	700	750	700	800
开门高度 (mm)		2000	2000	2000	2000	2000	2000
混凝土 井道	井道宽度 (mm)	1400	1350	1500	1450	1500	1500
	井道深度 (mm)	1400	1455	1450	1505	1650	1705
框架 井道	空间宽度 (mm)	1530	/	1630	/	1630	/
	空间深度 (mm)	1530	/	1580	/	1780	/

注：1.框架外尺寸参照以下数据：框架宽度=AH+80，框架深度=BH+80
2.最小顶层高度：3200mm；最小底坑深度：270mm；最大提升高度：18m；最小井道尺寸：1150mm×1455mm

世家系列·钢带侧置电梯规格表 List of specifications

载重量		250				320				400			
结构型式		ZD01 中分	ZD03 旁开	ZD02 中分贯通	ZD04 旁开贯通	ZD01 中分	ZD03 旁开	ZD02 中分贯通	ZD04 旁开贯通	ZD01 中分	ZD03 旁开	ZD02 中分贯通	ZD04 旁开贯通
对重位置		侧置				侧置				侧置			
轿厢净宽 (mm)		800	800	800	800	900	900	900	900	1000	1000	1000	1000
轿厢净深 (mm)		1000	1000	1000	1000	1100	1100	1100	1100	1250	1250	1250	1250
轿厢净高 (mm)		2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100
开门宽度 (mm)		600	650	600	650	650	700	650	700	700	750	700	750
开门高度 (mm)		2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
混凝土 井道	井道宽度 (mm)	1350	1350	1380	1350	1450	1450	1450	1450	1550	1550	1550	1550
	井道深度 (mm)	1250	1300	1350	1460	1350	1400	1450	1560	1500	1550	1600	1710
框架 井道	空间宽度 (mm)	1480	/	1510	/	1580	/	1580	/	1680	/	1680	/
	空间深度 (mm)	1380	/	1480	/	1480	/	1580	/	1630	/	1730	/
注：1.框架外尺寸参照以下数据：框架宽度=AH+80，框架深度=BH+80 2.最小顶层高度：3100mm；最小底坑深度：270mm；最大提升高度：18m；最小井道尺寸：1350mm×1200mm													

优家系列·龙门架电梯规格表 List of specifications

载重量		250		320				400			
结构型式		ZD01 中分	ZD03 旁开	ZD01 中分	ZD03 旁开	ZD02 中分贯通	ZD04 旁开贯通	ZD01 中分	ZD03 旁开	ZD02 中分贯通	ZD04 旁开贯通
对重位置		侧置		侧置				侧置			
轿厢净宽 (mm)		800	800	900	900	800	800	1000	1000	1000	1000
轿厢净深 (mm)		1000	1000	1100	1100	1200	1200	1250	1250	1250	1250
轿厢净高 (mm)		2100	2100	2100	2100	2100	2100	2100	2100	2100	2100
开门宽度 (mm)		650	650	700	700	700	700	750	750	750	750
开门高度 (mm)		2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
混凝土 井道	井道宽度 (mm)	1450	1370	1550	1470	1550	1370	1650	1570	1650	1570
	井道深度 (mm)	1250	1300	1350	1400	1550	1660	1500	1550	1600	1710
框架 井道	空间宽度 (mm)	1580	/	1680	/	1680	/	1780	/	1780	/
	空间深度 (mm)	1380	/	1480	/	1680	/	1630	/	1730	/
注：1.框架外尺寸参照以下数据：框架宽度=AH+80，框架深度=BH+80 2.最小顶层高度：2800mm；最小底坑深度：320mm；最大提升高度：15m；最小井道尺寸：1370mmX1250mm											

智家系列·集成背包电梯规格表 List of specifications

载重量		180	250	320		400	
结构型式		SL01 单开	SL01 单开	SL01 单开	SL02 直角	SL01 单开	SL02 直角
对重位置		后置	后置	后置	后置	后置	后置
轿厢净宽 (mm)		800	900	900	1000	1000	1100
轿厢净深 (mm)		690	800	1100	1100	1250	1250
轿厢净高 (mm)		2100	2100	2100	2100	2100	2100
开门宽度 (mm)		630	800	800	750	800	800
开门高度 (mm)		2000	2000	2000	2000	2000	2000
混凝土 井道	井道宽度 (mm)	1000	1150	1150	1150	1250	1250
	井道深度 (mm)	1000	1250	1550	1550	1700	1700
框架 井道	空间宽度 (mm)	1130	1310	1310	1310	1410	1410
	空间深度 (mm)	1130	1410	1710	1710	1860	1860

注：1.最小顶层高度：2900mm，最大提升高度：15m
2.除载重180kg外，框架外尺寸参照以下数据：框架宽度=AH+110，框架深度=BH+110
3.当载重180kg时，框架外尺寸参照以下数据：框架宽度=AH+80，框架深度=BH+80
4.除载重180kg外，最小底坑深度：250mm，最小井道尺寸：1150mm×1150mm
5.当载重180kg时，最小底坑深度：150mm，最小井道尺寸：900mm×900mm